

# Energy Management

## Energy Meter with plug-in Output Modules

### Type EM4-DIN

CARLO GAVAZZI



- Degree of protection (front): IP 40
- Front dimensions: 9 DIN modules
- RS 422/485 Serial port by means of optional module
- Dual pulse output by means of optional module
- Alarm output (kW dmd) by means of optional module
- Digital inputs for the management of the time periods and of the H<sub>2</sub>O and GAS meters

- Class 1 (active energy)
- Class 2 (reactive energy)
- Three-phase multi-function energy meter
- Back-lighted LCD display
- 3½ DGT instantaneous variables read-out
- 8 DGT + 7½ DGT energy read-out
- Measurements of system and phase variables: W, Wdmd
- Measurements of total energies: kWh, kvarh
- Measurements of partial energies: kWh, kvarh
- Energy measurements according to EN61036 and EN61268
- Energy measurements by time periods (t1-t2-t3-t4) selectable by input contacts
- Measurements of m<sup>3</sup> H<sub>2</sub>O and m<sup>3</sup> GAS by means of input contacts
- TRMS measurements of distorted wave forms (voltages/currents)
- Two basic models: direct connection 20(100)AAC, CT 5(10)AAC and VT connection
- Self power supply (available for some models only) or auxiliary power supply: 24V, 48V, 115V, 230V, 50-60Hz; 18 to 60VDC, 77 to 143VDC

### Product description

Three-phase energy meter with built-in configuration key-pad; particularly indicated for the metering and the management of the energy in addition to the metering and the management of the signals coming from the water and gas meters.

Housing for DIN-rail or wall-mounting, IP40 (front) protection degree.

Completely sealable housing. In case of direct connection up to 100A, the measuring

input terminals are suitable for cables with a cross-section area from 6 to 35 mm<sup>2</sup>. The special design of the instrument's housing allows to add at any time the interface modules, even when the instrument is already installed. The following modules are available:

- for all versions: pulse output;
- only for the versions with auxiliary power supply: digital inputs, RS485 serial port and BUS Dupline.

### How to order **EM4-DIN AV5 3 X X XX**

Model	<input type="text"/>
Range code	<input type="text"/>
System	<input type="text"/>
Power supply	<input type="text"/>
Slot A	<input type="text"/>
Slot B	<input type="text"/>

#### Important note:

- The models from AV0 to AV7 can be equipped with any type of available modules (slot A and B).
- The models AV8 and AV9 can be equipped only with the "O" and "R" type modules.
- The AV8 and AV9 models can measure all the parameters even if the three phase system being connected is missing one phase.
- The AV2 model is suitable only for three-phase unbalanced system without neutral.

### Type selection

Range Code	Power supply	Slot A (retransmission)	Slot A (retransmission) cont.
<b>Auxiliary Power Supply:</b>	<b>For all versions</b>		
AV0: 208V <sub>L-L</sub> /20(100)AAC [3]	A: 24VAC B: 48VAC C: 115VAC D: 230VAC	X: None O: AO2900 module Dual open collector output. Three operating modes: • two pulse outputs (kWh and kvarh); • one alarm output (kW dmd) and one pulse output (kWh or kvarh) • one output remotely controlled by a serial port and one pulse output (kWh or kvarh)	R: AO2910 module. One relay output + one open collector output. Operation modes like module AO2900
AV1: 400V <sub>L-L</sub> /20(100)AAC [1]	-15+10%, 50-60Hz		
AV3: 660V <sub>L-L</sub> /20(100)AAC [2]			
AV4: 208V <sub>L-L</sub> /5(10)AAC [3]	-15+10%, 50-60Hz		
AV5: 400V <sub>L-L</sub> /5(10)AAC [1]			
AV6: 100V <sub>L-L</sub> /5(10)AAC [3]	-15+10%, 50-60Hz		
AV7: 660V <sub>L-L</sub> /5(10)AAC [2]			
<b>Self Power Supply:</b>			
AV2: 220V <sub>L-L</sub> /20(100)AAC [4]	4: 18 to 60VDC		
AV8: 208V <sub>L-L</sub> /20(100)AAC [1]	5: 77 to 143VDC		
AV9: 400V <sub>L-L</sub> /20(100)AAC [1]			
<b>System</b>	<b>AV2, AV8 and AV9 only</b>		
3 :	X: Self Power Supply 400V <sub>L-L</sub> (-20+15%, 50-60Hz)	D: AO2940 module Two digital inputs for the management of water and gas meters	
3 : Three-phase, unbalanced load with or without neutral	208V <sub>L-L</sub> (-20+15%, 50-60Hz)		
	220V <sub>L-L</sub> (-10+15%, 50-60Hz)		
			<b>Slot B (retransmission)</b>
			<b>Only with A-B-C-D-4 power supply</b>
			XX: None S0: AR2950 module RS422/485 serial port

[1] Un: -20+15% [2] Un: -30+15% [3] Un: -20+20% [4] Un: -10 +15%

## Input specifications

<b>Number of inputs</b>		<b>Temperature drift</b>	≤ 200 ppm/°C
Current	3	<b>Sampling rate</b>	1000 samplings/s @ 50Hz
Voltage	4	<b>Display</b>	Back-lighted LCD 3½ DGT Total: 8 DGT + 7½ DGT; Partial: 8 DGT + 7½ DGT;
<b>Accuracy</b> (display, RS485)	Ib: 5A, Imax: 10A Ib: 20A, Imax: 100A Un: see "Range code" on previous page from 0.003lb to 0.2lb: ±(0.5%RDG + 3DGT) from 0.2lb to Imax: ±(0.5%RDG + 1DGT)	<b>Max. and Min. indication</b>	Max. 1999 (99999999), Min. 0
Current	in the range Un: ±(0.5% RDG + 1DGT) ±0.1% RDG (50 to 60 Hz)	<b>Measurements</b>	Power, energy. TRMS measurements of distorted wave forms. Direct
Voltage		<b>Crest factor</b>	
Frequency		Ib 5A Ib 20A	≤3 (15A max. peak) ≤6 (127A max. peak)
Active power (@ 25°C ± 5°C, R.H. ≤ 90%)	±(1% RDG + 1DGT). PF 1, 0.1lb to Imax, in the Un range; PF 0.5L, PF 0.8C, 0.2lb to Imax, in the Un range	<b>Current overload</b>	5(10) A, for 10ms 5(10) A, for 500ms 5(10) A, permanent 20(100) A, for 10ms 20(100) A, permanent
Energies (@ 25°C ± 5°C, R.H. ≤ 90%)	Class 1 acc. to EN61036 Class 2 acc. to EN61268 Ib: 5A, Imax: 10A 0.1lb: 500mA, Start up current: 20mA Un: see table "range code" Ib: 20A, Imax: 100A 0.1lb: 2A, Start up current: 80mA Un: see table "range code"	<b>Voltage overload</b>	300A max, @ 50Hz 200A max, @ 50Hz 10A, @ 50Hz 2700A max, @ 50Hz 100A, @ 50Hz
<b>Additional errors</b>	Acc. to EN61036, EN61268 <1% (3rd harmonic: 10%) < 0.5% (referred to Un) 0 (up to 0.5 mT) < 1% 0	<b>Input impedance</b>	1.2 Un 2 Un
Wave form			
Voltage asymmetry			
Magnetic induction			
HF Electromagnetic fields			
Operation of accessories			
		<b>Frequency</b>	50 to 60 Hz

## Interface module specifications

<b>RS422/RS485</b> (on request)	AR2950 module	2000 V <sub>RMS</sub> output to supply input
Type	Multidrop bidirectional (static and dynamic variables) 2 or 4 wires, max. distance 1000m, termination directly on the module 255, selectable by key-pad MODBUS/JBUS	
Connections		
Addresses		
Protocol		
Data (bidirectional)		
Dynamic (reading only)	Phase and system variables: see table "Display pages" All the programming data, reset of energy, activation of static output. Stored energy (EEPROM) max. 99.999.999 kWh/kvarh	To be used as energy retransmission, water and gas, remote static outputs and alarm. Three working modes are selectable:
Static (writing only )	1 start bit, 8 data bit, no parity, 1 stop bit 9600 bit/s	<ul style="list-style-type: none"> <li>• two pulse outputs (kWh and kvarh);</li> <li>• one alarm output (kW dmd) and one pulse output (kWh or kvarh);</li> <li>• one output remotely controlled by means of the serial port and one pulse output (kWh or kvarh)</li> </ul>
Data format	By means of optocouplers, 2000 V <sub>RMS</sub> output to measuring inputs	Pulse outputs Number of outputs Number of pulses
Baud-rate		
Insulation		
		Output type
		2 From 0.01 to 100 pulses programmable according to the selected CT and VT ratios Open collector (NPN transistor ) V <sub>ON</sub> 1.2 VDC / max. 100 mA

## Interface module specifications (cont.)

Pulse duration	$V_{OFF}$ 30 VDC max. 220 ms (ON), $\geq$ 220 ms (OFF) According to DIN43864		supply input. Insulation between the two outputs: 2000 V <sub>RMS</sub>
Alarm output		Digital inputs (on request)	AQ2940 module
Number of outputs	1		Four working modes are selectable: <ul style="list-style-type: none"> <li>total and partial energy meters (kWh and kvarh) without the use of digital inputs</li> <li>total and partial energy meters (kWh and kvarh) managed by time periods (<math>t_1-t_2-t_3-t_4</math>);</li> <li>total energy meters (kWh, kvarh) and total "day-time/night" GAS meter;</li> <li>total energy meters (kWh, kvarh), GAS and WATER meters;</li> </ul>
Alarm type	Up alarm, down alarm.		
Setpoint adjustment	0 to 100% of the electrical scale		
Hysteresis	0 to 100% of the electrical scale		
On-time delay	0 to 255 seconds		
Response time	700 ms		
Output type	Open collector (transistor NPN) $V_{ON}$ 1.2 VDC / max. 100 mA $V_{OFF}$ 30 VDC max.		
Insulation	By means of optocouplers, 2000 V <sub>RMS</sub> outputs to measuring inputs, 2000 V <sub>RMS</sub> output to supply input. Insulation between the two outputs: functional		
AO2910 module	Relay + open collector output. Working mode like AO2900.	Number of inputs	2
Pulse output	One static output+one relay output, other characteristics like AO2900.	Input frequency	20Hz max.
Alarm output	Only relay output, other characteristics like AO2900.	Duty cycle	50%
Output type	Static type like module AO2900; Relay type: SPDT, AC1, AC15: 1AAC @250VAC	Prescaler adjustment	from 0,1 to 100,0 m <sup>3</sup> / pulse
Insulation	2000 V <sub>RMS</sub> outputs to measuring inputs, 2000 V <sub>RMS</sub> output to	Contact measur. voltage	12V < +Aux < 24VDC
		Contact measur. current	Logic status: OFF < 2V, ON > 10V
		Input impedance	15mA max
		Contact resistance	1kΩ
		Insulation	≤ 1kΩ, close contact ≥ 100kΩ, open contact
			By means of optocouplers, 2000 V <sub>RMS</sub> digital inputs to measuring inputs, 2000 V <sub>RMS</sub> digital inputs to supply input.

## Software functions

Password	Numeric code of max. 3 digits 2 protection levels of the programming data Password "0", no protection Password from 1 to 1000, all data are protected	Display Variables	to 5A)
1 <sup>st</sup> level 2 <sup>nd</sup> level			Up to 4 variables per page Page 1: kWh-kvarh Page 2a: k Wh ( $t_1-t_2-t_3-t_4$ ) k varh ( $t_1-t_2-t_3-t_4$ ) Page 2b: GAS m <sup>3</sup> day-time tariff, GAS m <sup>3</sup> night tariff Page 2c: H <sub>2</sub> O m <sup>3</sup> , GAS m <sup>3</sup> Page 3: W <sub>L1</sub> Page 4: W <sub>L2</sub> Page 5: W <sub>L3</sub> Page 6: W <sub>dmd</sub> Phase sequence, serial communication status, wrong connection of current measuring inputs.
Transformer ratio CT VT	1 to 5000 1.0 to 199.9 and 200 to 1999 Note: The CT ratio * VT ratio must never exceed the value 5000. The current measuring inputs can manage CT's with a secondary of 1A and 5A (accuracy always refers	Errors	

## Supply specifications

Self supplied version	400V <sub>L-L</sub> (-20% +15%, 50-60Hz) 208V <sub>L-L</sub> (-20% +15%, 50-60Hz) 220V <sub>L-L</sub> (-10+15%, 50-60Hz)	Auxiliary power supply	230VAC -15 +10%, 50-60Hz 115VAC -15 +10%, 50-60Hz 48VAC; -15 +10%, 50-60Hz 24VAC; -15 +10%, 50-60Hz 18 to 60VDC; 77 to 143VDC
		Energy consumption	≤ 7VA

## General Specifications

<b>Operating temperature</b>	0 to +55°C (32°F to 131°F) (R.H. < 90% non-condensing 40°C)	<b>Standards</b> Safety Metrology	IEC60664-1 Energy measurements: EN61036, EN61268. DIN43864
<b>Storage temperature</b>	-20 to +60°C (-4°F to 140°F) (R.H. < 90% non-condensing 40°C)	Pulse output	CE
<b>Installation category</b>	Cat. III (IEC60664)	<b>Connections 5(10) A</b> Cable cross-section area	Screw-type, 4 mm <sup>2</sup>
<b>Insulation</b>	2000 VRMS between all inputs / outputs to earth	<b>Connections 20(90) A</b> Min./Max. cable cross-section area Min./Max. screws tightening torque Min./Max. screws tightening torque	Screw-type, 6 mm <sup>2</sup> / 35 mm <sup>2</sup> 2 Nm / 6 Nm (100A inputs) 0,4 Nm / 0,8Nm (other inputs / outputs)
<b>Dielectric strength</b>	4000 VRMS for 1 minute	<b>Housing</b> Dimensions Material	162.5 x 90 x 63 mm ABS, NORYL, PC self-extinguishing: UL 94 V-0
<b>Noise rejection</b> CMRR	100 dB, 48 to 62 Hz	<b>Mounting</b>	DIN-rail and wall
<b>EMC</b>		<b>Degree of protection</b>	Front: IP40 Connections: IP20
Burst	4kV/level 4 (EN61000-4-4)	<b>Weight</b>	800 g approx. (packing included)
Immunity to irradiated electromagnetic fields	10V/m 26-1000MHz (EN61000-4-3)		
Electrostatic discharges	15kV (EN61000-4-2)		
Radio frequency emissions	according to CISPR 14 and CISPR 22		
<b>Pulse voltage (1.2/50μs)</b>	8kV (EN61000-4-5)		

## Display pages

### Variables that can be displayed

No	1 <sup>st</sup> variable	2 <sup>nd</sup> variable	Notes
1	kWh	kvarh	
2a	kWh (t <sub>1</sub> or t <sub>1</sub> -t <sub>2</sub> -t <sub>3</sub> -t <sub>4</sub> )	kvarh (t <sub>1</sub> or t <sub>1</sub> -t <sub>2</sub> -t <sub>3</sub> -t <sub>4</sub> )	Depending on the type of selection you have chosen.
2b	Day-time GAS m <sub>3</sub>	Night GAS m <sub>3</sub>	For the energy it is possible to choose the following operating mode:
2c	H <sub>2</sub> O m <sub>3</sub>	GAS m <sub>3</sub>	t <sub>1</sub> partial meters or t <sub>1</sub> -t <sub>2</sub> -t <sub>3</sub> -t <sub>4</sub> multitariff selection
3	W <sub>L1</sub>		
4	W <sub>L2</sub>		
5	W <sub>L3</sub>		
6	W <sub>dmd</sub>		dmd = demand (integration time selectable from 1 to 30 min.)
7	Display of the serial communication status, phase sequence, wrong connection of current measuring inputs		

### Used calculation formulas

#### Phase variables

Instantaneous effective voltage

$$V_p = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n V_i^2}$$

Instantaneous active power

$$W_p = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n V_i \cdot I_i}$$

Instantaneous power factor (TPF)

$$I_p = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n I_i^2}$$

Instantaneous effective current

$$A_p = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n A_i^2}$$

Instantaneous apparent power

$$VA_p = V_p \cdot A_p$$

Instantaneous reactive power

$$VAR_p = \sqrt{(VA_p)^2 - (W_p)^2}$$

**Note:** RS422/RS485 "dynamic data". The variables transmitted are the ones listed in the table above and those mentioned in the "Display pages" of WM22-DIN data sheet except for: THD<sub>A</sub>, THD<sub>V</sub>, A max, W<sub>dmd</sub>max, and VA<sub>dmd</sub> max.

#### System variables

Equivalent system voltage

$$V_s = \frac{V_1 + V_2 + V_3}{3} * \sqrt{3}$$

System reactive power

$$VA_s = (VA_{L1} + VA_{L2} + VA_{L3})$$

System active power

$$W_s = W_{L1} + W_{L2} + W_{L3}$$

System apparent power

$$VA_s = \sqrt{W_s^2 + VAR_s^2}$$

System power factor

$$\cos\phi_s = \frac{W_s}{VA_s}$$

(TPF)

#### Consumption recording

$$W_{rec} = \sum_{i=n_1}^{n_2} W_i \cdot \Delta t$$

$$VA_{rec} = \sum_{i=n_1}^{n_2} VA_i \cdot \Delta t$$

Note:

i = phase (L1, L2 or L3)

P = active power

Q = reactive power

t<sub>1</sub>, t<sub>2</sub> = starting and ending time points of consumption recording

n = time unit

Δt = time interval of consumption recording

n<sub>1</sub>, n<sub>2</sub> = starting and ending discrete time points of consumption recording

## Available models

Type	Inputs	Power supply	Ordering code
EM4-DIN AV9.3.X.	400V <sub>L-L</sub> , 20(100)A	Self power supply	AG2200
EM4-DIN AV8.3.X.	208V <sub>L-L</sub> , 20(100)A	Self power supply	AG2201
EM4-DIN AV2.3.x	220V <sub>L-L</sub> , 20(100)A	Self power supply	AG2244
EM4-DIN AV1.3.D.	400V <sub>L-L</sub> , 20(100)A	230VAC, 50-60Hz	AG2202
EM4-DIN AV0.3.D.	208V <sub>L-L</sub> , 20(100)A	230VAC, 50-60Hz	AG2203
EM4-DIN AV3.3.D.	660V <sub>L-L</sub> , 20(100)A	230VAC, 50-60Hz	AG2204
EM4-DIN AV1.3.C.	400V <sub>L-L</sub> , 20(100)A	115VAC, 50-60Hz	AG2205
EM4-DIN AV0.3.C.	208V <sub>L-L</sub> , 20(100)A	115VAC, 50-60Hz	AG2206
EM4-DIN AV3.3.C.	660V <sub>L-L</sub> , 20(100)A	115VAC, 50-60Hz	AG2207
EM4-DIN AV1.3.B.	400V <sub>L-L</sub> , 20(100)A	48VAC, 50-60Hz	AG2208
EM4-DIN AV0.3.B.	208V <sub>L-L</sub> , 20(100)A	48VAC, 50-60Hz	AG2209
EM4-DIN AV3.3.B.	660V <sub>L-L</sub> , 20(100)A	48VAC, 50-60Hz	AG2210
EM4-DIN AV1.3.A.	400V <sub>L-L</sub> , 20(100)A	24VAC, 50-60Hz	AG2211
EM4-DIN AV0.3.A.	208V <sub>L-L</sub> , 20(100)A	24VAC, 50-60Hz	AG2212
EM4-DIN AV3.3.A.	660V <sub>L-L</sub> , 20(100)A	24VAC, 50-60Hz	AG2213
EM4-DIN AV5.3.D.	400V <sub>L-L</sub> , 5(10)A	230VAC, 50-60Hz	AG2214
EM4-DIN AV4.3.D.	208V <sub>L-L</sub> , 5(10)A	230VAC, 50-60Hz	AG2215
EM4-DIN AV7.3.D.	660V <sub>L-L</sub> , 5(10)A	230VAC, 50-60Hz	AG2216
EM4-DIN AV5.3.C.	400V <sub>L-L</sub> , 5(10)A	115VAC, 50-60Hz	AG2217
EM4-DIN AV4.3.C.	208V <sub>L-L</sub> , 5(10)A	115VAC, 50-60Hz	AG2218
EM4-DIN AV7.3.C.	660V <sub>L-L</sub> , 5(10)A	115VAC, 50-60Hz	AG2219
EM4-DIN AV5.3.B.	400V <sub>L-L</sub> , 5(10)A	48VAC, 50-60Hz	AG2220
EM4-DIN AV4.3.B.	208V <sub>L-L</sub> , 5(10)A	48VAC, 50-60Hz	AG2221
EM4-DIN AV7.3.B.	660V <sub>L-L</sub> , 5(10)A	48VAC, 50-60Hz	AG2222
EM4-DIN AV5.3.A.	400V <sub>L-L</sub> , 5(10)A	24VAC, 50-60Hz	AG2223
EM4-DIN AV4.3.A.	208V <sub>L-L</sub> , 5(10)A	24VAC, 50-60Hz	AG2224
EM4-DIN AV7.3.A.	660V <sub>L-L</sub> , 5(10)A	24VAC, 50-60Hz	AG2225
EM4-DIN AV6.3.D.	100V <sub>L-L</sub> , 5(10)A	230VAC, 50-60Hz	AG2226
EM4-DIN AV6.3.C.	100V <sub>L-L</sub> , 5(10)A	115VAC, 50-60Hz	AG2227
EM4-DIN AV6.3.B.	100V <sub>L-L</sub> , 5(10)A	48VAC, 50-60Hz	AG2228
EM4-DIN AV6.3.A.	100V <sub>L-L</sub> , 5(10)A	24VAC, 50-60Hz	AG2229
EM4-DIN AV1.3.4 / [5]	400V <sub>L-L</sub> , 20(100)A	18-60VDC [77-143VDC]	AG2230 [AG2237]
EM4-DIN AV0.3.4 / [5]	208V <sub>L-L</sub> , 20(100)A	18-60VDC [77-143VDC]	AG2231 [AG2238]
EM4-DIN AV3.3.4 / [5]	660V <sub>L-L</sub> , 20(100)A	18-60VDC [77-143VDC]	AG2232 [AG2239]
EM4-DIN AV5.3.4 / [5]	400V <sub>L-L</sub> , 5(10)A	18-60VDC [77-143VDC]	AG2233 [AG2240]
EM4-DIN AV4.3.4 / [5]	208V <sub>L-L</sub> , 5(10)A	18-60VDC [77-143VDC]	AG2234 [AG2241]
EM4-DIN AV7.3.4 / [5]	660V <sub>L-L</sub> , 5(10)A	18-60VDC [77-143VDC]	AG2235 [AG2242]
EM4-DIN AV6.3.4 / [5]	100V <sub>L-L</sub> , 5(10)A	18-60VDC [77-143VDC]	AG2236 [AG2243]

## Available modules

Type	Channels	Code	Type	Channels	Code
Open collector output	2	AO2900	Digital inputs	2	AQ2940
Relay + open coll. output	2	AO2910	RS485 Serial Output	1	AR2950




## Possible module combinations

Power supply	Self p.s.		Auxiliary p.s.		Power supply	Self p.s.		Auxiliary p.s.	
	Slot A	Slot B	Slot A	Slot B		Slot A	Slot B	Slot A	Slot B
Basic unit					Basic unit				
Open collector output	●		●		Digital inputs			●	
Relay + open coll. output	●		●		RS485 Serial Output		● (*)		●




(\*) AV2 only

## Wiring diagrams




### 20(100)A model: three-phase unbalanced load

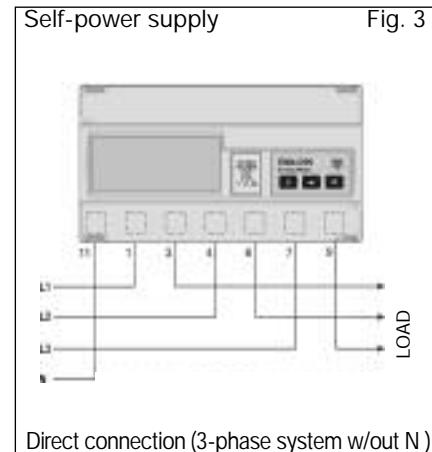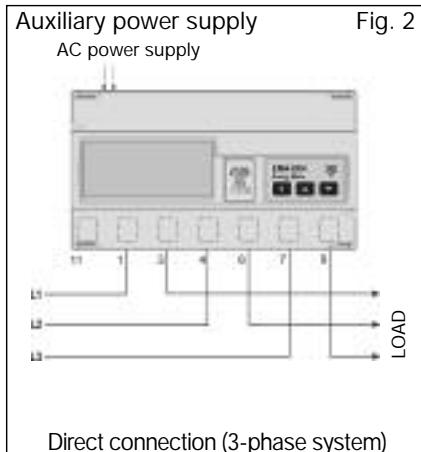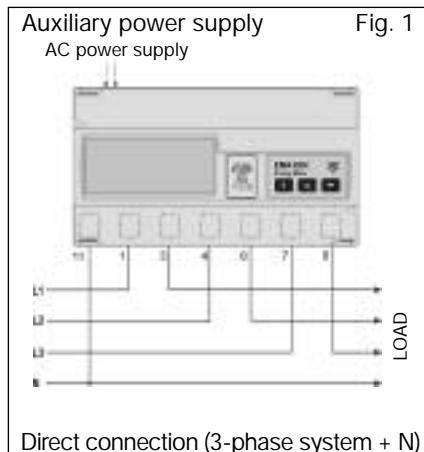

### 20(100)A model: three-phase unbalanced load

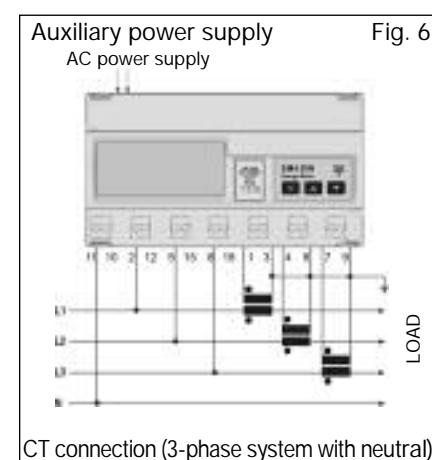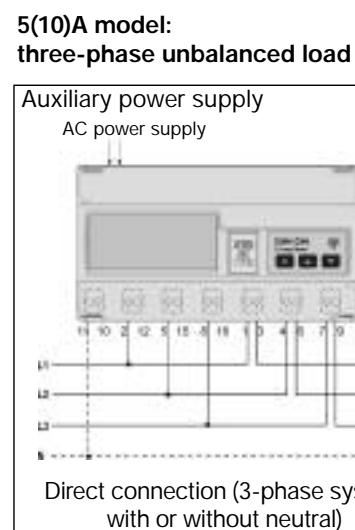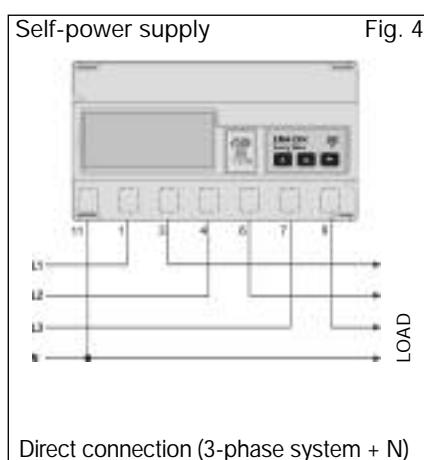


### 5(10)A model: three-phase unbalanced load

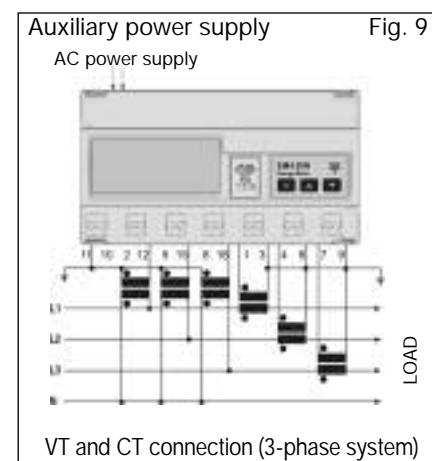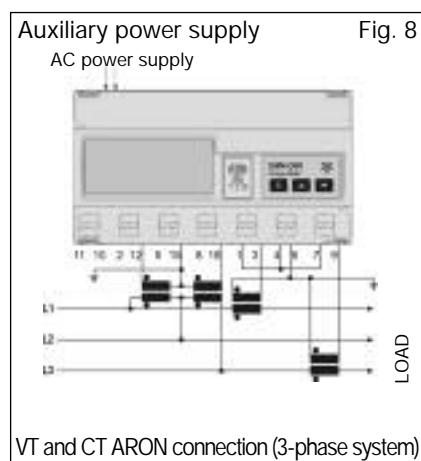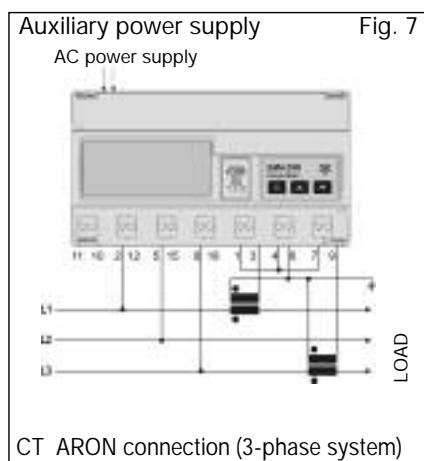

## Wiring diagrams (optional modules)

Open collector output

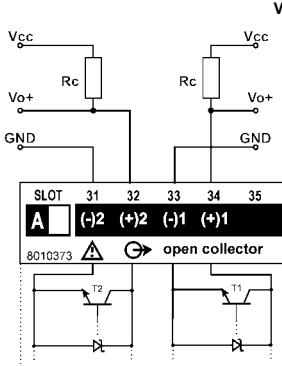

VDC max 30V


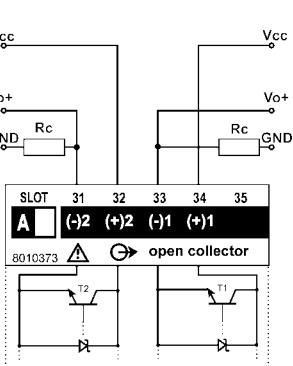


Fig.10

Relay + open coll. output Fig. 11

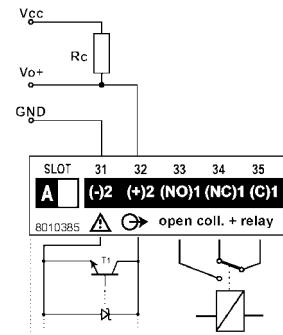

Only open collector outputs: the grounds of the outputs are separated, and therefore it's possible to carry out, for the same module, two different connections. The load resistance ( $R_C$ ) must be designed so that the closed contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30V. VDC: power supply voltage output.  $V_{O+}$ : positive output contact (open collector transistor). GND: ground output contact (open collector transistor).

Digital inputs


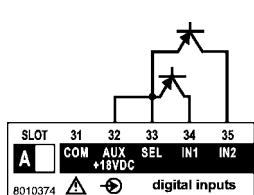


Fig. 12

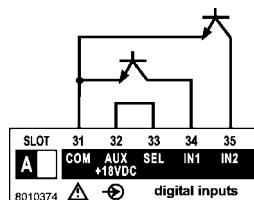

PNP-NPN connections

Digital inputs


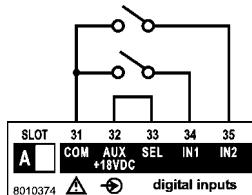


Fig. 13

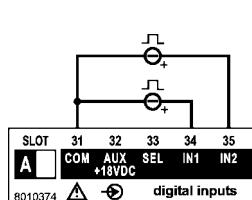

Contact and voltage connection

RS485 Serial output


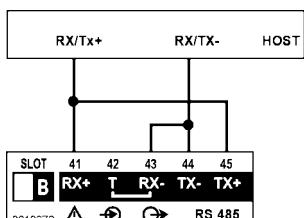



Fig. 14

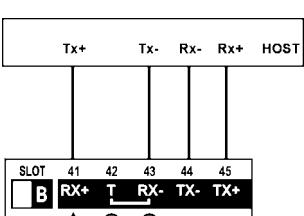


2 and 4-wire connection

## Accuracy


Accuracy (RDG) depending on the current

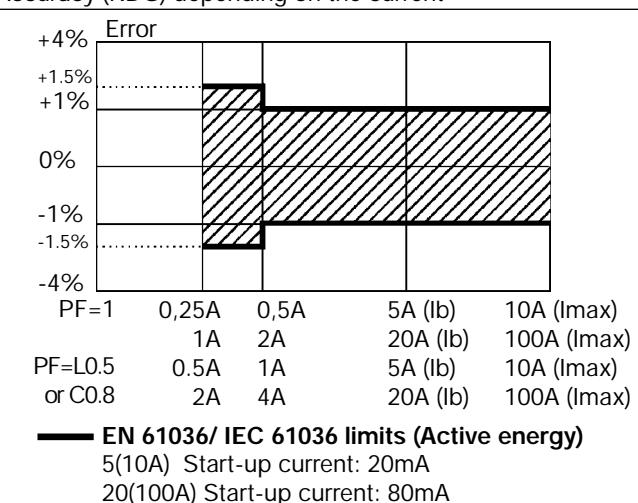

Accuracy (RDG) depending on the current

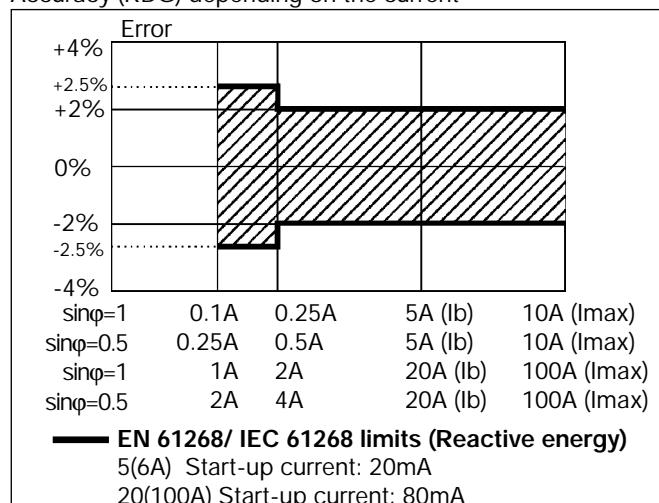

## Front panel description

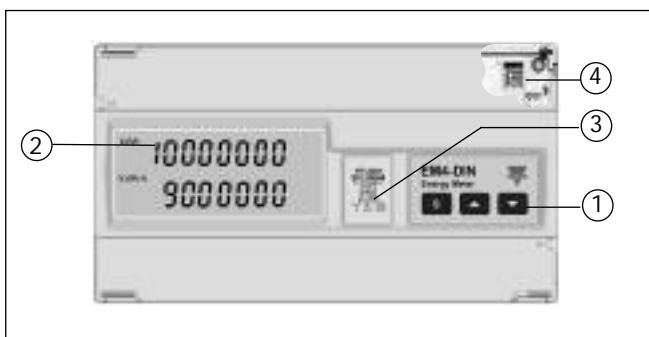

### 1. Key-pad

To program configuration parameters and to display variables.

S-key to enter programming and confirm selections;

Keys for:

- values programming;
- function selection;
- displaying the measuring pages.

### 2. Display

LCD with alphanumeric indications to:

- display configuration parameters;
- display all the measured variables.

### 3. Removable label


It shows the following information:

- year of manufacturing
- serial number
- input voltages and currents
- operating frequency
- kWh measuring class
- kvarh measuring class
- symbols: electric system, attention and dual insulation.

### 4. Hidden dip-switch


Enable/disable the access to the programming procedure.

## Dimensions and panel cut-out

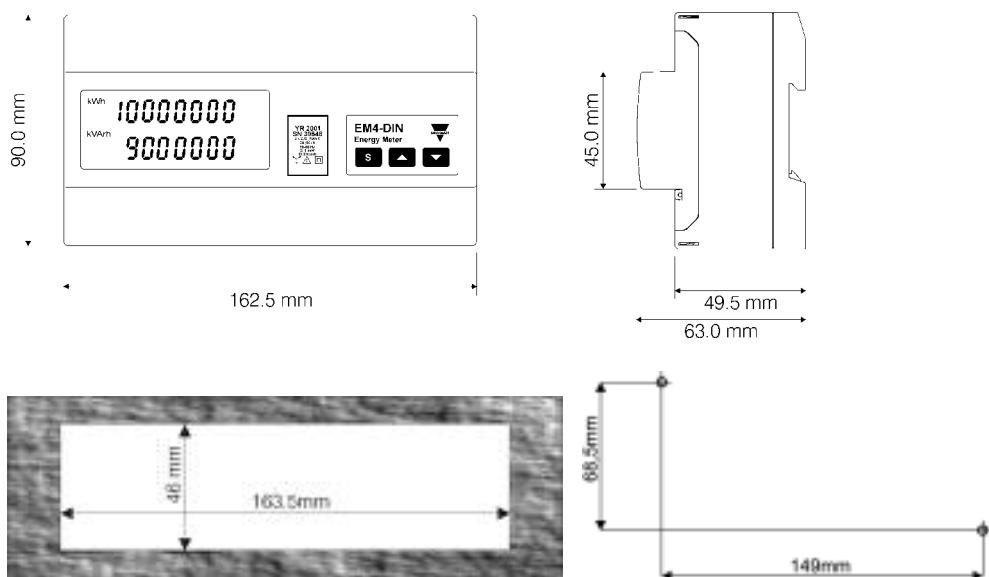


## Terminal boards


Open collector dual output module

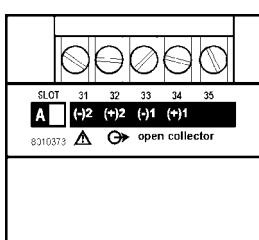


Relay output + open coll. output module

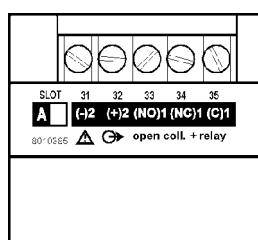

RS485 Serial output module

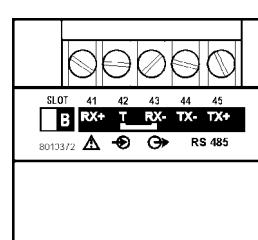

Digital inputs module

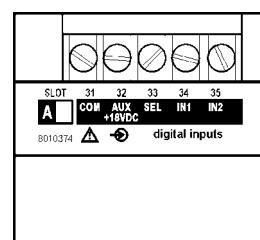

AO 2900

AO 2910

AR 2950

AQ 2940