

## Han K 4/0 Pin Female Insert

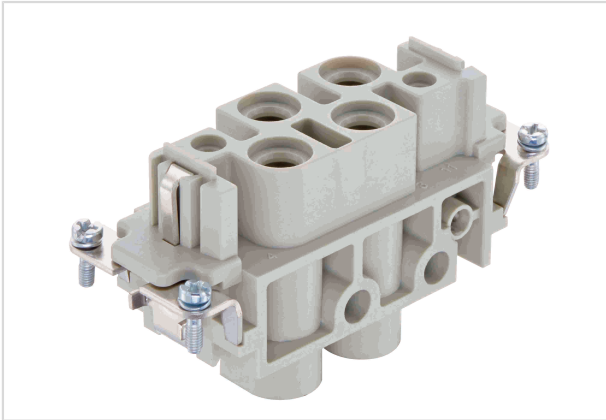


Image is for illustration purposes only. Please refer to product description.

Part number	09 38 006 2711
Specification	Han K 4/0 Pin Female Insert
HARTING eCatalogue	<a href="https://b2b.harting.com/09380062711">https://b2b.harting.com/09380062711</a>

### Identification

Category	Inserts
Series	Han-Com®
Identification	Han® K 4/0

### Version

Termination method	Screw termination
Gender	Female
Size	16 B
Number of contacts	4
PE contact	Yes

### Technical characteristics

Conductor cross-section	1.5 ... 16 mm <sup>2</sup>
Rated current	80 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	80 A
Rated voltage acc. to UL	600 V
Rated current acc. to CSA	80 A
Rated voltage acc. to CSA	300 V
Insulation resistance	>10 <sup>10</sup> Ω
Contact resistance	≤0.3 mΩ



Pushing Performance

## Technical characteristics

Stripping length	14 mm
Tightening torque	1.2 Nm @ 1.5 mm <sup>2</sup>
	2 Nm @ 2.5 mm <sup>2</sup>
	3 Nm @ 4 mm <sup>2</sup>
	3 Nm @ 6 mm <sup>2</sup>
	3 Nm @ 10 mm <sup>2</sup>
	3 Nm @ 16 mm <sup>2</sup>
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500

## Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight
	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1
	IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	1
----------------	---



Pushing Performance

## Commercial data

Net weight	114 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440205 Contact insert for industrial connectors