
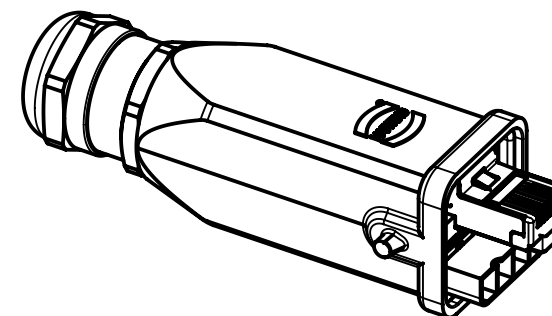
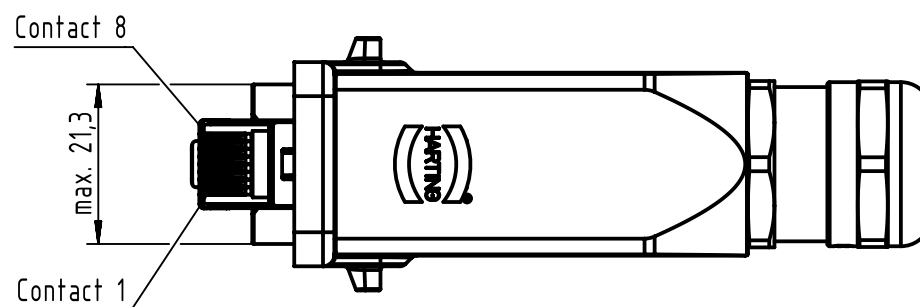
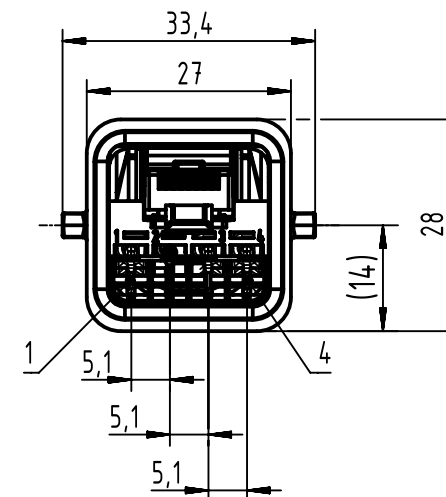


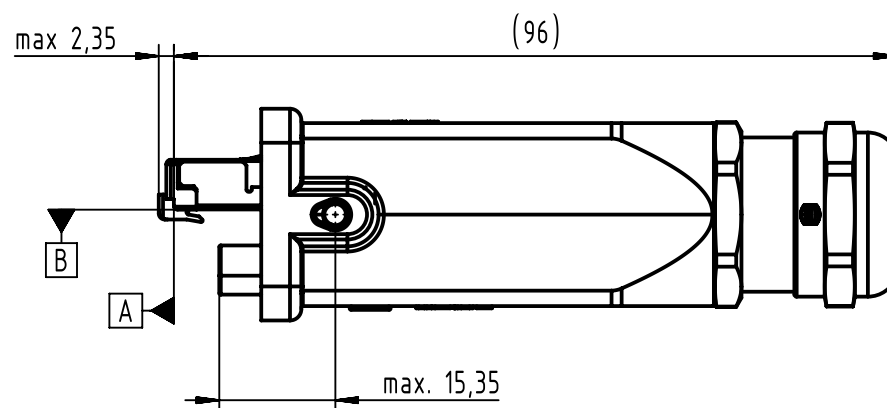

- For stranded conductors
AWG 28 up to AWG 24
- Max. wire diameter 1.05mm
- Cable diameter 6 - 12mm
- Degree of protection IP65/IP67
- Cat.6A performance class EA
suitable for 1/10 Gigabit Ethernet
- Temperature range -40°C up to +70°C
- 750 mating cycles

Data contact plating : Au 1.27µm (50pinch) over nickel

		All Dimensions in mm Original Size DIN A4		Scale 1:1		Free size tol.		Ref.	
								Sub.	
		All rights reserved		Created by TAMAS		Inspected by AVRAM		Standardisation HOFFMANN	
HARTING Electronics GmbH D-32339 Espelkamp		Department EC PD - RO		Date 2016-07-05		State Final Release			
		Title Han3A RJ45 Hybrid GL Cat6A plug 8+4p met						Doc-Key / ECM-Nr. 100515069/UGD/002/C 500000106140	
		Type TB		Number 09451151720				Rev. C	Page 1/1