


2/2 WAY DIRECT ACTING SOLENOID VALVE, G 1/4"



normally closed

TYPE: D249

TECHNICAL SPECIFICATIONS


Media:	water, oil, air
Media temperature:	-10°C ÷ +130°C
Ambient temperature:	-10°C ÷ +50°C
Body material:	brass (CW617N EN 12165)
Operator material:	stainless steel
Seal material:	FKM
Coil power:	AC 18vA (holding) AC 36vA (inrush) DC 14w
Protection class:	IP 65 (with connector)



SELECTION TABLE

VALVE	G connection	nominal diameter	flow rate Kvs	min	OPD	
					max AC	max DC
code	[ISO 228 G]	[mm]	[l/min]	[barg]	[barg]	[barg]
D249DVD	1/4"	1.7	1.5	0	25	24
D249DVF	1/4"	2.2	2.4	0	18	16
D249DVH	1/4"	3.0	4.5	0	10	6

COILS	
code	[Volts/Hz]
7250	24v DC
7200	24v 50/60Hz
7400	110v 50/60Hz
7600	200v 50Hz - 220v 60Hz
7700	230v 50Hz - 240v 60Hz

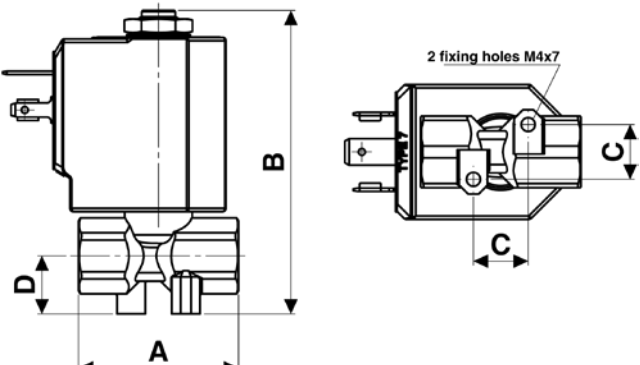

DIMENSIONS & WEIGHTS

G connection	A	B	C	D	weight
[ISO 228 G]	[mm]	[mm]	[mm]	[mm]	[kg]
1/4"	38	72.1	13	13.8	0.18